



SHANGHAI YONGXING ELECTRONIC SWITCH CO., LTD.



SHANGHAI YONGXING ELECTRONIC



KCD1 Series Rocker Switches	01-04
KCD2 Series Rocker Switches	05-07
KCD3 Series Rocker Switches	08-10
KCD5 Series Rocker Switches	11-12
KCD6 Series Rocker Switches	13-14
KCD7 Series Rocker Switches	15-16
KCD8 Series Rocker Switches	17-19
KCD10 Series Rocker Switches	20-21
KCD11 Series Rocker Switches	22
KCD Series Printing Graphics And Bar Code	23-25




SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55 , T85 , T125
Electronic Life(cycles)	10,000

Max. Rating Current & Voltage

	16(4)A 250V AC T85
	16R(4)A 125V AC 16R(4)A 250V AC 1HP 125V AC
	16(4)A 250V AC T125, 10(4)A 250V AC T125 16(4)A 250V AC T85, 16A 250V AC

HOW TO ORDER

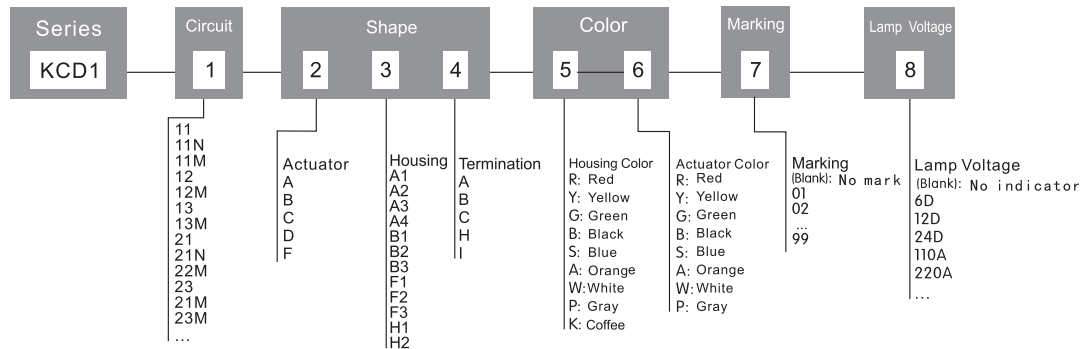

1 KCD1 CIRCUIT CODE

Code	Circuit	Description	Code	Circuit	Description
11		SP-ST	21		DP-ST
12		SP-DT	21N		DP-ST Illuminated
11N		SP-ST Illuminated	22		DP-DT
11M		SP-ST Momentary	22M		DP-DT Momentary
12M		SP-DT Momentary	23		DP-TT
13		SP-TT	13M		SP-TT Momentary
21M		DP-ST Momentary	23M		DP-TT Momentary

2 ACTUATOR CODE

Code	Diagram	Description	Code	Diagram	Description	Code	Diagram	Description	Code	Diagram	Description	Code	Diagram	Description
A		Plane	B		V-Shaped	C		Arc-Shaped	D		Arc-Shaped Point Lamp	F		Arc-Shaped With Shield

3 HOUSING CODE

Code	Diagram	Panel cut out	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
A1		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.1^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.2^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.3^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.1 ^{+0.10} ₀	10.7 ^{+0.10} ₀	1.25~2.00	28.2 ^{+0.10} ₀	10.7 ^{+0.10} ₀	2.00~3.00	28.3 ^{+0.10} ₀	10.7 ^{+0.10} ₀	A/ B/ C/ D/ F	11M/ 12M/ 13M	A
Z	X	Y															
0.75~1.25	28.1 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
1.25~2.00	28.2 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
2.00~3.00	28.3 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
A4		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.1^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.2^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.3^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.1 ^{+0.10} ₀	10.7 ^{+0.10} ₀	1.25~2.00	28.2 ^{+0.10} ₀	10.7 ^{+0.10} ₀	2.00~3.00	28.3 ^{+0.10} ₀	10.7 ^{+0.10} ₀	A/ B/ C/ D/ F	11N	A/ C
Z	X	Y															
0.75~1.25	28.1 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
1.25~2.00	28.2 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
2.00~3.00	28.3 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
A5		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>27.7^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>27.8^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.0^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	27.7 ^{+0.10} ₀	10.7 ^{+0.10} ₀	1.25~2.00	27.8 ^{+0.10} ₀	10.7 ^{+0.10} ₀	2.00~3.00	28.0 ^{+0.10} ₀	10.7 ^{+0.10} ₀	C	11/ 11N/ 12/ 13	C
Z	X	Y															
0.75~1.25	27.7 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
1.25~2.00	27.8 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
2.00~3.00	28.0 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
A6		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.4^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.8^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>29.0^{+0.10}₀</td> <td>10.7^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.4 ^{+0.10} ₀	10.7 ^{+0.10} ₀	1.25~2.00	28.8 ^{+0.10} ₀	10.7 ^{+0.10} ₀	2.00~3.00	29.0 ^{+0.10} ₀	10.7 ^{+0.10} ₀	C	11/ 11N/ 12/ 13	C
Z	X	Y															
0.75~1.25	28.4 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
1.25~2.00	28.8 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
2.00~3.00	29.0 ^{+0.10} ₀	10.7 ^{+0.10} ₀															
B1		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.2^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.3^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀	A/ B/ C/ D	21/22/ 22M/23 21M/23M	A
Z	X	Y															
0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
B2		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>29.6^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>30.6^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>30.8^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	29.6 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	30.6 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	30.8 ^{+0.10} ₀	22.1 ^{+0.10} ₀	A/ B/ C/ D	21/ 21N	A/ C
Z	X	Y															
0.75~1.25	29.6 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	30.6 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	30.8 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
B3		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.2^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.3^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀	A/ B/ C/ D	21/ 21N	A/ C
Z	X	Y															
0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
F1 Waterproof		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.1^{+0.10}₀</td> <td>13.5^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.2^{+0.10}₀</td> <td>13.5^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.3^{+0.10}₀</td> <td>13.5^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.1 ^{+0.10} ₀	13.5 ^{+0.10} ₀	1.25~2.00	28.2 ^{+0.10} ₀	13.5 ^{+0.10} ₀	2.00~3.00	28.3 ^{+0.10} ₀	13.5 ^{+0.10} ₀	B/ C	11/12/ 11N/13	B
Z	X	Y															
0.75~1.25	28.1 ^{+0.10} ₀	13.5 ^{+0.10} ₀															
1.25~2.00	28.2 ^{+0.10} ₀	13.5 ^{+0.10} ₀															
2.00~3.00	28.3 ^{+0.10} ₀	13.5 ^{+0.10} ₀															

Code	Diagram	Panel cut out	Match the project selection														
			Operating conditions	Circuit	Terminal Blocks												
F2		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>29.0^{+0.10}₀</td> <td>13.5^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>29.2^{+0.10}₀</td> <td>13.5^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>29.4^{+0.10}₀</td> <td>13.5^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	29.0 ^{+0.10} ₀	13.5 ^{+0.10} ₀	1.25~2.00	29.2 ^{+0.10} ₀	13.5 ^{+0.10} ₀	2.00~3.00	29.4 ^{+0.10} ₀	13.5 ^{+0.10} ₀	B/ C	11/12/ 11N/13	B
Z	X	Y															
0.75~1.25	29.0 ^{+0.10} ₀	13.5 ^{+0.10} ₀															
1.25~2.00	29.2 ^{+0.10} ₀	13.5 ^{+0.10} ₀															
2.00~3.00	29.4 ^{+0.10} ₀	13.5 ^{+0.10} ₀															
F3		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.2^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.3^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀	C	21/22/ 21N/23	B
Z	X	Y															
0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
H1		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>1.00~2.00</td> <td>28.8^{+0.10}₀</td> <td>12.7^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>29.2^{+0.10}₀</td> <td>12.7^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	1.00~2.00	28.8 ^{+0.10} ₀	12.7 ^{+0.10} ₀	2.00~3.00	29.2 ^{+0.10} ₀	12.7 ^{+0.10} ₀	C	11/ 11N	H/ I			
Z	X	Y															
1.00~2.00	28.8 ^{+0.10} ₀	12.7 ^{+0.10} ₀															
2.00~3.00	29.2 ^{+0.10} ₀	12.7 ^{+0.10} ₀															
H2		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>25.6^{+0.10}₀</td> <td>12.5^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>26.0^{+0.10}₀</td> <td>12.5^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>26.2^{+0.10}₀</td> <td>12.5^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	25.6 ^{+0.10} ₀	12.5 ^{+0.10} ₀	1.25~2.00	26.0 ^{+0.10} ₀	12.5 ^{+0.10} ₀	2.00~3.00	26.2 ^{+0.10} ₀	12.5 ^{+0.10} ₀	C	11/ 11N	H/ I
Z	X	Y															
0.75~1.25	25.6 ^{+0.10} ₀	12.5 ^{+0.10} ₀															
1.25~2.00	26.0 ^{+0.10} ₀	12.5 ^{+0.10} ₀															
2.00~3.00	26.2 ^{+0.10} ₀	12.5 ^{+0.10} ₀															

4 TERMINATION CODE

Code	Diagram	Description
A		6.3*0.8 Standard Terminal Blocks
B		6.3*0.8 Standard Terminal Blocks
C		6.3*0.8 Welding type Terminal Blocks
H		6.3*0.8 Welding type Terminal Blocks
I		6.3*0.8 Welding type Terminal Blocks




5 HOUSING COLOR

Code	R	G	Y	S	W	B	P	A	K
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange	Coffee

6 ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 MARKING

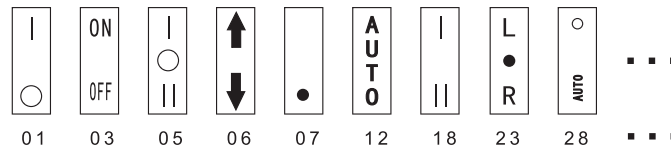

Specific see attached list

8 LAMP VOLTAGE

Lamp	LED								Neon	
	DC6V	DC12V	DC24V	AC/DC6V	AC/DC12V	AC/DC24V	AC/DC110V	AC/DC220V	AC110V	AC220V
Code	DC 6	DC 12	DC 24	AC/DC6	AC/DC12	AC/DC24	AC/DC110	AC/DC220	AC 110	AC 220

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The main color of housing is black and white.
- The main types of illuminate switch are 220V neon lamps, and less LED products, and basically are LED DC24V.
- The printed character on the button according to customer demand, there are a few dozen kinds can be printed and published at present, usually can meet customer demand.
- The special voltage, current and color needs to be customized.

KCD1 EXAMPLE



KCD1-21N-CB1A-B-GR-01-220A



KCD1-21N-DB2A-B-GR-220A



KCD1-11N-CH1H-S-A-03-110A



KCD1-12-CF2B-B-G



KCD1-11-FA4A-B-R-03



KCD1-12-AA1A-B-R



KCD1-13-CA1A-B-B-05



KCD1-11-CF2B-B-B-01



KCD1-12-BA1A



KCD1-12-DA1A-B-R

Note: Due to we couldn't get full information from the appearance, such as voltages, parameters and the switch with or without light, so the full model please refer to models based on the actual needs and the definition and parameters of table selection.




SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55 , T85 , T125
Electronic Life(cycles)	10,000

Max. Rating Current & Voltage

	16(4)A 250V AC T85
	16R(4)A 125V AC 16R(4)A 250V AC 1HP 125V AC
	16(4)A 250V AC T125, 10(4)A 250V AC T125 16(4)A 250V AC T85, 16A 250V AC

KCD2 HOW TO ORDER

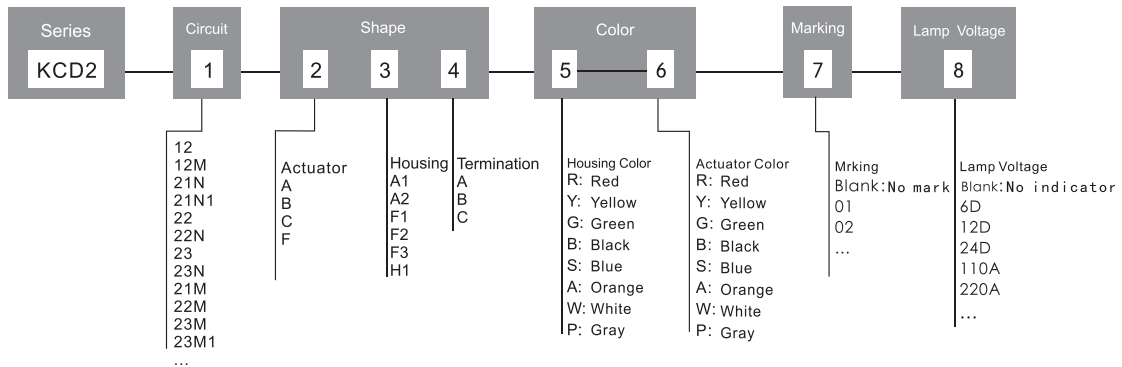

1 KCD2 CIRCUIT CODE

Code	Circuit	Description	Code	Circuit	Description
12		SP-DT	23		DP-TT
12M		SP-DT Momentary	23N		DP-TT Illuminated
21		DP-ST	21M		DP-ST Momentary
21N		DP-ST Illuminated	22M		DP-DT Return
21N1		DP-ST Illuminated	23M		DP-TT Double Momentary
22		DP-DT	23M1		DP-TT Single Momentary
22N		DP-DT Illuminated	21NM		DP-ST Illuminated Momentary
22NM		DP-DT Illuminated Momentary			



2 ACTUATOR CODE

Code	Diagram	Description	Code	Diagram	Description	Code	Diagram	Description	Code	Diagram	Description
A		Plane	B		V-Shaped	C		Arc-Shaped	F		Arc-Shaped With Shield

3 HOUSING CODE

Code	Diagram	Panel cut out (mm)	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
A1		 <table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>27.9^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.0^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	27.9 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	28.0 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	A/ B/ C/ F	12/12M/21/ 21N/22/22N/ 23/23N/ 21M/22M/ 23M/23M1/ 21NM/22NM	A
Z	X	Y															
0.75~1.25	27.9 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	28.0 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
A2		 <table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>30.0^{+0.10}₀</td> <td>22.0^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>30.6^{+0.10}₀</td> <td>22.0^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>31.0^{+0.10}₀</td> <td>22.0^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	30.0 ^{+0.10} ₀	22.0 ^{+0.10} ₀	1.25~2.00	30.6 ^{+0.10} ₀	22.0 ^{+0.10} ₀	2.00~3.00	31.0 ^{+0.10} ₀	22.0 ^{+0.10} ₀	A/ B/ C/	12/12M/21/ 21N/22/22N/ 23/23N/ 21M/22M/ 23M/23M1/ 21NM/22NM	A
Z	X	Y															
0.75~1.25	30.0 ^{+0.10} ₀	22.0 ^{+0.10} ₀															
1.25~2.00	30.6 ^{+0.10} ₀	22.0 ^{+0.10} ₀															
2.00~3.00	31.0 ^{+0.10} ₀	22.0 ^{+0.10} ₀															
F1 防水型		 <table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>30.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>30.2^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>30.3^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	30.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	30.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	30.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀	C	12/12M/21/ 21N/22/22N/ 23/23N/ 21M/22M/ 23M/23M1/ 21NM/22NM	B
Z	X	Y															
0.75~1.25	30.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	30.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	30.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
F2 防水型		 <table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.2^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.3^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀	C	12/12M/21/ 21N/22/22N/ 23/23N/ 21M/22M/ 23M/23M1/ 21NM/22NM	B
Z	X	Y															
0.75~1.25	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	28.3 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
F3 防水型		 <table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>28.0^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.2^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	28.0 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀	C	12/12M/ 21/22/23/ 21M/22M/ 23M/23M1	A
Z	X	Y															
0.75~1.25	28.0 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	28.2 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
H1		 <table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>27.9^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>28.0^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>28.1^{+0.10}₀</td> <td>22.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	27.9 ^{+0.10} ₀	22.1 ^{+0.10} ₀	1.25~2.00	28.0 ^{+0.10} ₀	22.1 ^{+0.10} ₀	2.00~3.00	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀	A/ B/ C/ F	21/ 21N1/ 21M/ 21N/ 21NM	A/ C
Z	X	Y															
0.75~1.25	27.9 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
1.25~2.00	28.0 ^{+0.10} ₀	22.1 ^{+0.10} ₀															
2.00~3.00	28.1 ^{+0.10} ₀	22.1 ^{+0.10} ₀															

4 TERMINAL CODE

Code	Diagram	Description
A		6.3*0.8 Standard Terminal Blocks
B		6.3*0.8 Standard Terminal Blocks
C		6.3*0.8 Standard Terminal Blocks


5 HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

6 ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 MARKING

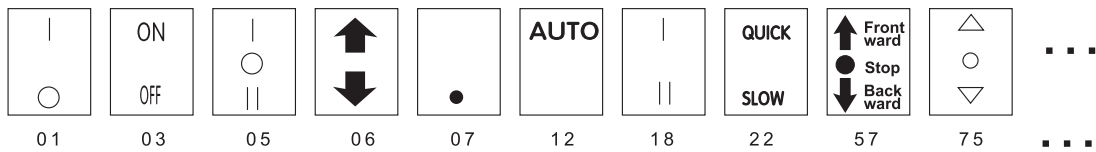

Specific see attached list

8 LAMP VOLTAGE

Lamp	LED							Neon		
Voltage	DC6V	DC12V	DC24V	AC/DC6V	AC/DC12V	AC/DC24V	AC/DC110V	AC/DC220V	AC110V	AC220V
Code	DC 6	DC 12	DC 24	AC/DC6	AC/DC12	AC/DC24	AC/DC110	AC/DC220	AC 110	AC 220

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The main color of housing is black and white.
- The main types of illuminate switch are 220V neon lamps, and less LED products, and basically are LED DC24V.
- The printed character on the button according to customer demand, there are a few dozen kinds can be printed and published at present, usually can meet customer demand.
- The special voltage, current and color needs to be customized.

KCD2 EXAMPLE



KCD2-22-CA1A-B-B-01



KCD2-22-CA1A-B-G-01



KCD2-23-CA1A-B-B-75



KCD2-22-BA1A-W-G



KCD2-22-AA1A-B-R



KCD2-21-CA1A-B-B-01



KCD2-21-BA1A-W-Y-01



KCD2-22-AA1A-W-G



KCD2-22-CA1A-B-R-01



KCD2-21-CA1A-B-R-01



KCD2-21-FA1A-B-B-01



KCD2-21-CF1B-B-G



KCD2-21-CF2B-B-R



KCD2-22-CF2B-B-B

Note: Due to we couldn't get full information from the appearance, such as voltages, parameters and the switch with or without light, so the full model please refer to models based on the actual needs and the definition and parameters of table selection.



KCD3 Series Rocker Switches




SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55 , T105
Electronic Life(cycles)	10,000

Max. Rating Current & Voltage

	10(3)A 250V AC T85
	6(3)A 250V AC T85
	15R(3) 125V AC 10R(3) 250V AC
	1/3HP 125V AC
	10(3)A 250V AC T105, 6(3)A 250V AC T105
	6A 250V AC, 4A 250V AC T105

KCD3 HOW TO ORDER

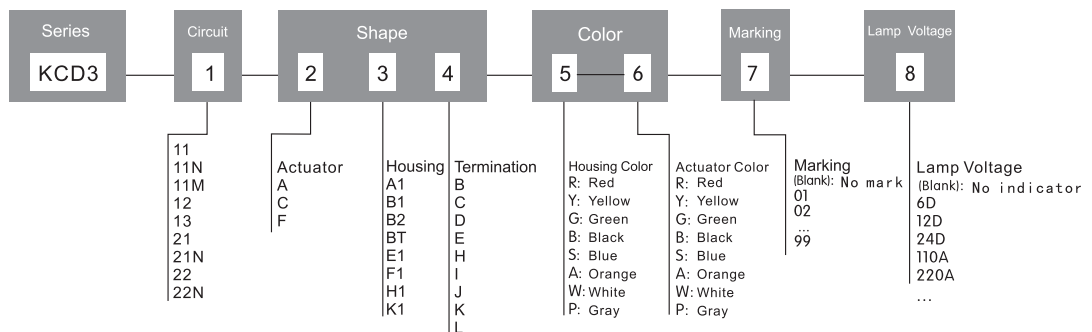

1 CIRCUIT CODE

Code	Circuit	Description	Code	Circuit	Description
11	ON - OFF	SP-ST	21	ON - OFF	DP-ST
12	ON - ON	SP-DT	21N	ON - OFF	DP-ST Illuminated
11N	ON - OFF	SP-ST Illuminated	22	ON - ON	DP-DT
11M	ON → OFF	SP-ST Momentary	22N	ON - OFF - ON	DP-DT Illuminated
13	ON - OFF - ON	SP-TT			

2 ACTUATOR CODE

Code	Diagram	Description	Code	Diagram	Description	Code	Diagram	Description
A		Plane	C		Arc-Shaped	F		Arc-Shaped With Shield

01

3 HOUSING CODE

Code	Diagram	Panel cut out (mm)	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
A1		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>19.2^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.3^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.4^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	19.2 ^{+0.10} ₀	13.1 ^{+0.10} ₀	1.25~2.00	19.3 ^{+0.10} ₀	13.1 ^{+0.10} ₀	2.00~3.00	19.4 ^{+0.10} ₀	13.1 ^{+0.10} ₀	C	21 / 21N / 22 / 22N	H
			Z	X	Y												
0.75~1.25	19.2 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
1.25~2.00	19.3 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
2.00~3.00	19.4 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
B1		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>19.4^{+0.10}₀</td> <td>13.0^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.5^{+0.10}₀</td> <td>13.0^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.6^{+0.10}₀</td> <td>13.0^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	19.4 ^{+0.10} ₀	13.0 ^{+0.10} ₀	1.25~2.00	19.5 ^{+0.10} ₀	13.0 ^{+0.10} ₀	2.00~3.00	19.6 ^{+0.10} ₀	13.0 ^{+0.10} ₀	C	11/11N/ 11M/ 12/13	B/ I/ J/ K
			Z	X	Y												
0.75~1.25	19.4 ^{+0.10} ₀	13.0 ^{+0.10} ₀															
1.25~2.00	19.5 ^{+0.10} ₀	13.0 ^{+0.10} ₀															
2.00~3.00	19.6 ^{+0.10} ₀	13.0 ^{+0.10} ₀															
B2		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>19.0^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.1^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.2^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	19.0 ^{+0.10} ₀	13.1 ^{+0.10} ₀	1.25~2.00	19.1 ^{+0.10} ₀	13.1 ^{+0.10} ₀	2.00~3.00	19.2 ^{+0.10} ₀	13.1 ^{+0.10} ₀	C	11	B/ I/ J/ K
			Z	X	Y												
0.75~1.25	19.0 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
1.25~2.00	19.1 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
2.00~3.00	19.2 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
BT		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>19.4^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.5^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.6^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	19.4 ^{+0.10} ₀	13.1 ^{+0.10} ₀	1.25~2.00	19.5 ^{+0.10} ₀	13.1 ^{+0.10} ₀	2.00~3.00	19.6 ^{+0.10} ₀	13.1 ^{+0.10} ₀	A	11M	B/ I/ J/ K
			Z	X	Y												
0.75~1.25	19.4 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
1.25~2.00	19.5 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
2.00~3.00	19.6 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
E1		<p>Z: Panel Thickness <2mm</p>	C	11/ 11N/ 12	B/ I/ J/ K												
						F1		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>19.2^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.3^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.4^{+0.10}₀</td> <td>13.1^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	19.2 ^{+0.10} ₀	13.1 ^{+0.10} ₀	1.25~2.00	19.3 ^{+0.10} ₀	13.1 ^{+0.10} ₀
Z	X	Y															
0.75~1.25	19.2 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
1.25~2.00	19.3 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
2.00~3.00	19.4 ^{+0.10} ₀	13.1 ^{+0.10} ₀															
H1		<p>Z: Panel Thickness <2mm</p> <p>NOTE: The upper and lower position of installation panel need to be located</p>	A	11/ 11N	D												
						K1		<table border="1"> <thead> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75~1.25</td> <td>19.4^{+0.10}₀</td> <td>12.7^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.5^{+0.10}₀</td> <td>12.7^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.6^{+0.10}₀</td> <td>12.7^{+0.10}₀</td> </tr> </tbody> </table>	Z	X	Y	0.75~1.25	19.4 ^{+0.10} ₀	12.7 ^{+0.10} ₀	1.25~2.00	19.5 ^{+0.10} ₀	12.7 ^{+0.10} ₀
Z	X	Y															
0.75~1.25	19.4 ^{+0.10} ₀	12.7 ^{+0.10} ₀															
1.25~2.00	19.5 ^{+0.10} ₀	12.7 ^{+0.10} ₀															
2.00~3.00	19.6 ^{+0.10} ₀	12.7 ^{+0.10} ₀															



4 TERMINAL CODE

Code	B	C	D	E	H	I	J	K	L
Diagram									
Description	4.8*0.8 Standard Terminal	4.8*0.8 Standard Terminal	2.5*0.5 Standard Terminal	4.8*0.8 Standard Terminal	2.2*0.6 Welding type Terminal	4.8*0.8 Welding type Terminal	4.8*0.8 Welding type Terminal	1.2*0.8 Welding type Terminal	4.8*0.8 Welding type Terminal


5 HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

6 ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 MARKING

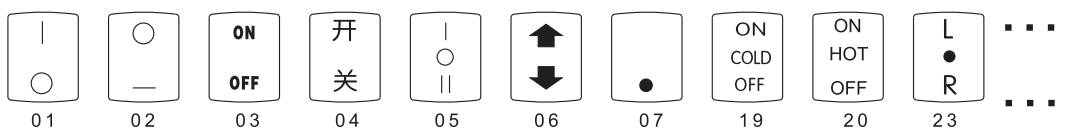

8 LAMP VOLTAGE

Lamp	LED								Neon	
Voltage	DC6V	DC12V	DC24V	AC/DC6V	AC/DC12V	AC/DC24V	AC/DC110V	AC/DC220V	AC110V	AC220V
Code	DC 6	DC 12	DC 24	AC/DC6	AC/DC12	AC/DC24	AC/DC110	AC/DC220	AC 110	AC 220

Specific see attached list

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The main color of housing is black and white.
- The main types of illuminate switch are 220V neon lamps, and less LED products, and basically are LED DC24V.
- The printed character on the button according to customer demand, there are a few dozen kinds can be printed and published at present, usually can meet customer demand.
- The special voltage, current and color needs to be customized.
- Shell code A1, B2, BT, F1, H1, K1product UL certification, UL certification with the rest of the code shell.

KCD3 EXAMPLE



Note: Due to we couldn't get full information from the appearance, such as voltages, parameters and the switch with or without light, so the full model please refer to models based on the actual needs and the definition and parameters of table selection.




SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55
Electronic Life(cycles)	10,000

Max. Rating Current & Voltage

	6A 250V AC
	15R(3) 125V AC 10R(3) 250V AC 1/3HP 125V AC

KCD5 HOW TO ORDER

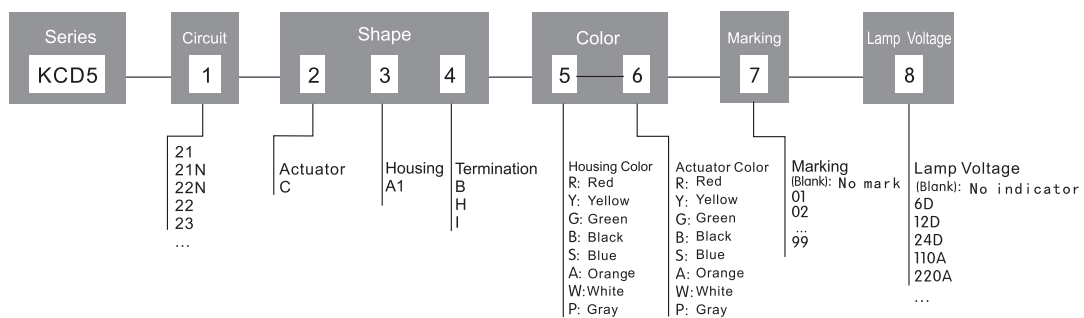

1 KCD5 CIRCUIT CODE

Code	Circuit	Description	Code	Circuit	Description
21		DP-ST	22N		DP-DT Illuminated
21N		DP-ST Illuminated	23		DP-TT
22		DP-DT			

2 ACTUATOR CODE

Code	Diagram	Description
C		Arc-Shaped

3 HOUSING CODE

Code	Diagram	Panel cut out (mm)	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
A1		<p>Z: Panel Thickness</p> <table border="1"> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75~1.25</td> <td>19.5^{+0.10}₀</td> <td>21.9^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.6^{+0.10}₀</td> <td>21.9^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.7^{+0.10}₀</td> <td>21.9^{+0.10}₀</td> </tr> </table>	Z	X	Y	0.75~1.25	19.5 ^{+0.10} ₀	21.9 ^{+0.10} ₀	1.25~2.00	19.6 ^{+0.10} ₀	21.9 ^{+0.10} ₀	2.00~3.00	19.7 ^{+0.10} ₀	21.9 ^{+0.10} ₀	C	21/22/22N 21N/23	B/ H/ I
Z	X	Y															
0.75~1.25	19.5 ^{+0.10} ₀	21.9 ^{+0.10} ₀															
1.25~2.00	19.6 ^{+0.10} ₀	21.9 ^{+0.10} ₀															
2.00~3.00	19.7 ^{+0.10} ₀	21.9 ^{+0.10} ₀															



4 TERMINAL CODE

Code	B	H	I
Diagram			
Description	4.8*0.8 Standard	4.8*0.8 Welding type	4.8*0.8 Welding type


5 HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

6 ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 Marking

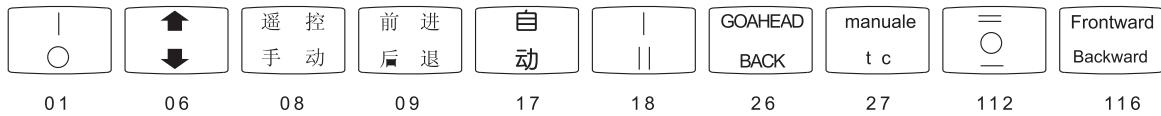

Specific see attached list

8 LAMP VOLTAGE

Lamp	LED								Neon	
	DC6V	DC12V	DC24V	AC/DC6V	AC/DC12V	AC/DC24V	AC/DC110V	AC/DC220V	AC110V	AC220V
Code	DC 6	DC 12	DC 24	AC/DC6	AC/DC12	AC/DC24	AC/DC110	AC/DC220	AC 110	AC 220

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The shell main color is black and white.
- The main types of illuminate switch are 220V neon lamps, and less led products, and basically are led DC24V.
- The printed character on the button according to customer demand, there are a few dozen kinds can be printed and published at present, usually can meet customer demand.
- The special voltage, current and color needs to be customized.

EXAMPLE



KCD5-21-CA1B-B-R-01



KCD5-21-CA1B-B-B-01



KCD5-23-CA1B-B-B-112



KCD5-22-CA1B-W-R-01



KCD5-22-CA1B-B-B-01



KCD5-21-CA1B-W-W-01



KCD5-21-CA1B-B-G-01




KCD5-22-CA1B-B-G-01


Note: Due to we couldn't get full information from the appearance, such as voltages, parameters and the switch with or without light, so the full model please refer to models based on the actual needs and the definition and parameters of table selection.





SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55
Electronic Life(cycles)	10,000
Max. Rating Current & Voltage	
	6A 250V AC


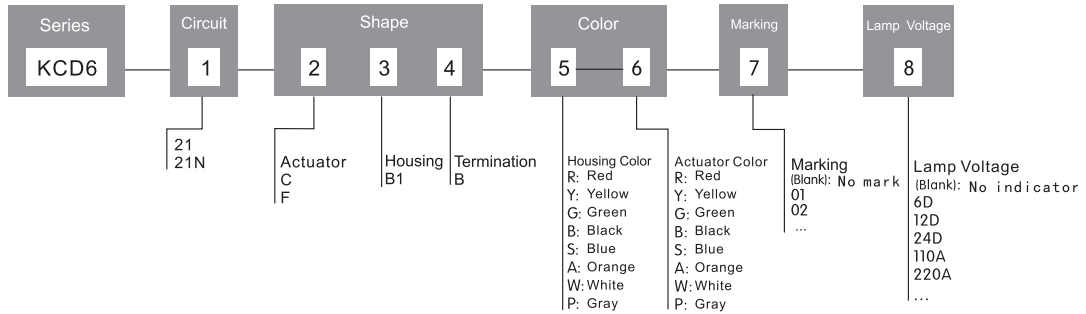
KCD6 HOW TO ORDER





1 KCD6 CIRCUIT CODE

Code	Circuit	Description
21	ON - OFF 	DP-ST
21N	ON - OFF 	DP-ST Illuminated

2 ACTUATOR CODE


Code	Diagram	Description
C		Arc-Shaped
F		Arc-Shaped With Shield

3 HOUSING CODE

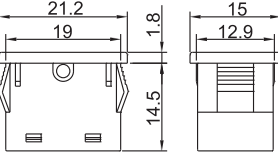Code	Diagram	Panel cut out (mm)	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
B1		 Z: Panel Thickness <table border="1"> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75~1.25</td> <td>19.4^{+0.10}₀</td> <td>13.0^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.5^{+0.10}₀</td> <td>13.0^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.6^{+0.10}₀</td> <td>13.0^{+0.10}₀</td> </tr> </table>	Z	X	Y	0.75~1.25	19.4 ^{+0.10} ₀	13.0 ^{+0.10} ₀	1.25~2.00	19.5 ^{+0.10} ₀	13.0 ^{+0.10} ₀	2.00~3.00	19.6 ^{+0.10} ₀	13.0 ^{+0.10} ₀	C/ F	21/ 21N	B
Z	X	Y															
0.75~1.25	19.4 ^{+0.10} ₀	13.0 ^{+0.10} ₀															
1.25~2.00	19.5 ^{+0.10} ₀	13.0 ^{+0.10} ₀															
2.00~3.00	19.6 ^{+0.10} ₀	13.0 ^{+0.10} ₀															



4 TERMINAL CODE

Code	B
Diagram	
Description	4.8*0.8 Standard


5 HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

6 ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 Marking



Specific see attached list

8 LAMP VOLTAGE

Lamp	LED								Neon	
Voltage	DC6V	DC12V	DC24V	AC/DC6V	AC/DC12V	AC/DC24V	AC/DC110V	AC/DC220V	AC110V	AC220V
Code	DC 6	DC 12	DC 24	AC/DC6	AC/DC12	AC/DC24	AC/DC110	AC/DC220	AC 110	AC 220

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The main color of housing is black and white.
- The main types of illuminate switch are 220V neon lamps, and less LED products, and basically are LED DC24V.
- The printed character on the button according to customer demand, there are a few dozen kinds can be printed and published at present, usually can meet customer demand.
- The special voltage, current and color needs to be customized.

KCD6 EXAMPLE



KCD6-21-CB1B-B-R-01



KCD6-21-CB1B-W-G



KCD6-21-CB1B-B-B-01



KCD6-21-CB1B-W-B




KCD6-21-FB1B-B-B-01

Note: Due to we couldn't get full information from the appearance, such as voltages, parameters and the switch with or without light, so the full model please refer to models based on the actual needs and the definition and parameters of table selection.


KCD7 Series Rocker Switches




SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55
Electronic Life(cycles)	10,000
Max. Rating Current & Voltage	
	6A 250V AC



HOW TO ORDER

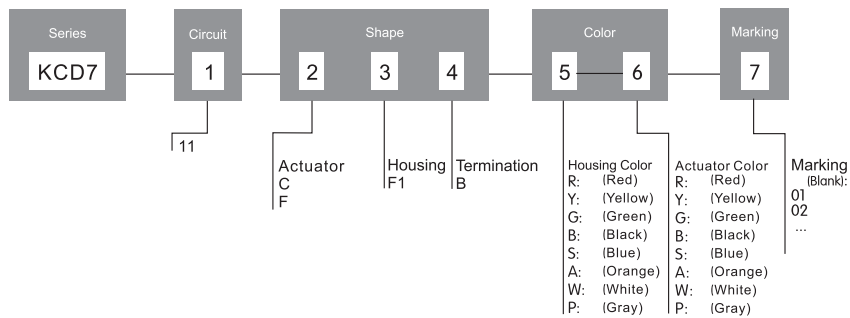



1 KCD7 CIRCUIT CODE

Code	Circuit	Description
11	ON - OFF 	SP-ST

2 ACTUATOR CODE

Code	Diagram	Description
C		Arc-Shaped
F		Waterproof arc surface

3 HOUSING CODE

Code	Diagram	Panel cut out	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
F1 Waterproof		 <table border="1"> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75~1.25</td> <td>19.4^{+0.10}₀</td> <td>6.5^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>19.5^{+0.10}₀</td> <td>6.5^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>19.6^{+0.10}₀</td> <td>6.5^{+0.10}₀</td> </tr> </table>	Z	X	Y	0.75~1.25	19.4 ^{+0.10} ₀	6.5 ^{+0.10} ₀	1.25~2.00	19.5 ^{+0.10} ₀	6.5 ^{+0.10} ₀	2.00~3.00	19.6 ^{+0.10} ₀	6.5 ^{+0.10} ₀	C F	11	B
Z	X	Y															
0.75~1.25	19.4 ^{+0.10} ₀	6.5 ^{+0.10} ₀															
1.25~2.00	19.5 ^{+0.10} ₀	6.5 ^{+0.10} ₀															
2.00~3.00	19.6 ^{+0.10} ₀	6.5 ^{+0.10} ₀															



KCD7 Series Rocker Switches

4 TERMINATION CODE

Code	B
Diagram	
Description	4.8*0.8 Standard

5 HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

6 ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 Marking



Specific see attached list

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The shell main color is black, white and grey.
- The printed character on the button according to customer demand.
- Color needs to be customized.

KCD7 EXAMPLE



KCD7-11-CA1A-B-R-01



KCD7-11-FF1B-B-B-01



KCD7-11-CF1B-B-R-01




KCD7-11-CF1B-B-B



SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55 , T85 , T105
Electronic Life(cycles)	10,000
Max. Rating Current & Voltage	
	6A 250V AC
	10(3)A 250V AC T105, 6(3)A 250V AC T105 6A 250V AC, 4A 250V AC T105
	15R(3) 125V AC 10R(3) 250V AC 1/3HP 125V AC

KCD8 HOW TO ORDER

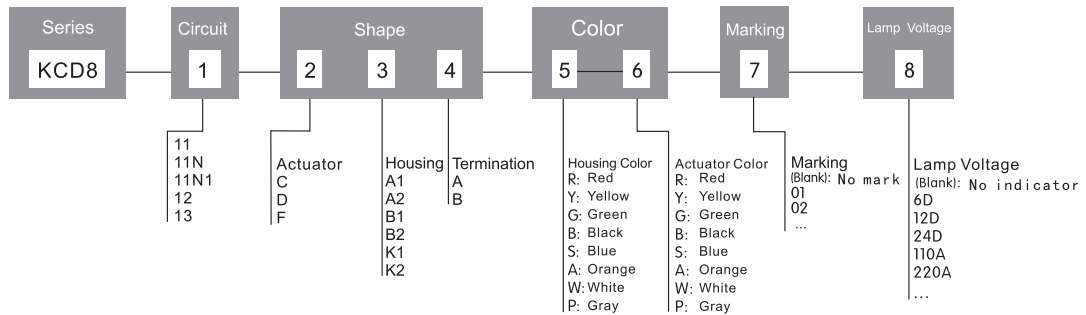

1 KCD8 CIRCUIT CODE

Code	Circuit	Description	Code	Circuit	Description
11		SP-ST	11N		SP-ST Illuminated
12		SP-DT	11N1		SP-ST Illuminated
13		SP-TT			

2 ACTUATOR CODE

Code	Diagram	Description	Code	Diagram	Description
C		Arc-Shaped	D		Arc-Shaped
F		Waterproof arc surface			



3 HOUSING CODE

Code	Diagram	Panel cut out (mm)	Match the project selection		
			Actuator	Circuit	Terminal Blocks
A1		Panel Thickness <4mm 	C / D/ F	11 / 11N / 11N1/ 12 / 13	A
A2		Panel Thickness <4mm 	C / D	11 / 11N / 11N1/ 12 / 13	A
B1		Panel Thickness <3mm 	C / D/ F	11 / 11N / 11N1/ 12 / 13	A
B2		Panel Thickness <3mm 	C / D	11 / 11N / 11N1/ 12 / 13	A
K1		Panel Thickness <3mm 	C	11 / 11N	B
K2		Panel Thickness <4mm 	C	11 / 11N	B

4 TERMINAL CODE

Code	A	B
Diagram		
Description	4.8*0.8 Terminal	4.8*0.8 Standard


5 HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	(Gray)	Orange

6 ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	(Gray)	Orange

7 Marking

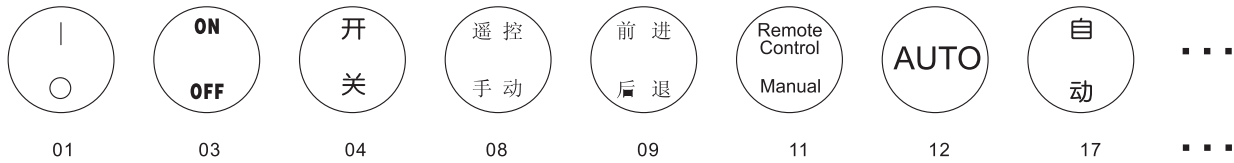

Specific see attached list

8 LAMP VOLTAGE

Lamp	LED								Neon	
Voltage	DC6V	DC12V	DC24V	AC/DC6V	AC/DC12V	AC/DC24V	AC/DC110V	AC/DC220V	AC110V	AC220V
Code	DC 6	DC 12	DC 24	AC/DC6	AC/DC12	AC/DC24	AC/DC110	AC/DC220	AC 110	AC 220

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The main color of housing is black and white.
- The main types of illuminate switch are 220V neon lamps, and less LED products, and basically are LED DC24V.
- The printed character on the button according to customer demand, there are a few dozen kinds can be printed and published at present, usually can meet customer demand.
- The special voltage, current and color needs to be customized.

KCD8 EXAMPLE



KCD8-12-CA2A-B-R-01



KCD8-12-CK2B-B-R-17



KCD8-12-CA1A-B-G-01



KCD8-11-CA2A-B-B-01



KCD8-13-CB1A-B-R-112



KCD8-13-CB1A-B-B-112



KCD8-11N-CK1B-B-R-17-220A



KCD8-11N1-DA1A-B-B-220A



KCD8-12-CB1A-B-R-01



KCD8-12-CB1A-B-B-01



KCD8-11-CA1A-B-B-01



KCD8-11-CB1A-P-P-01



KCD8-13-CA1A-B-B-112



KCD8-11-FB1A-B-B




KCD10 Series Rocker Switches



SPECIFICATION

Contact Resistance	≤50mΩ
Insulation Resistance	≥1,000MΩ
Dielectric Strength	1,500V AC , 1min
Operating temperature	T55 , T85 , T105
Electronic Life(cycles)	10,000
Max. Rating Current & Voltage	
	2A 250V AC

KCD10 HOW TO ORDER

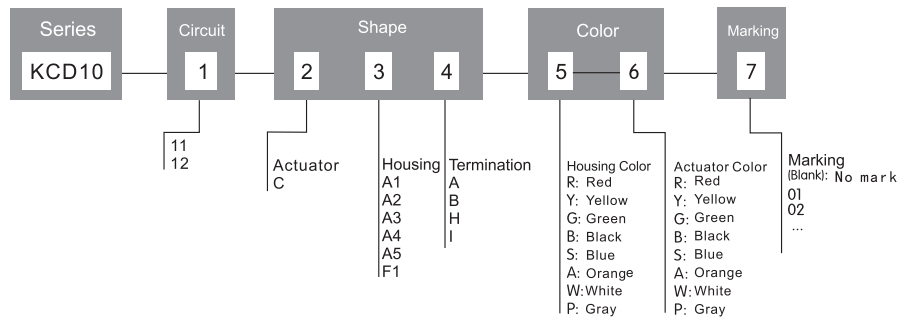

1 KCD10 CIRCUIT CODE

Code	Circuit	Description
11		SP-ST
12		SP-DT

2 ACTUATOR CODE

Code	Diagram	Description
C		Arc-Shaped

3 HOUSING CODE

Code	Diagram	Panel cut out (mm)	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
A1		<table border="1"> <tr> <td>Z</td> <td>X</td> <td>Y</td> </tr> <tr> <td>0.75~1.25</td> <td>13.7^{+0.10}₀</td> <td>9.1^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>13.8^{+0.10}₀</td> <td>9.1^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>13.9^{+0.10}₀</td> <td>9.1^{+0.10}₀</td> </tr> </table>	Z	X	Y	0.75~1.25	13.7 ^{+0.10} ₀	9.1 ^{+0.10} ₀	1.25~2.00	13.8 ^{+0.10} ₀	9.1 ^{+0.10} ₀	2.00~3.00	13.9 ^{+0.10} ₀	9.1 ^{+0.10} ₀	C	11/ 12	A/ H
Z	X	Y															
0.75~1.25	13.7 ^{+0.10} ₀	9.1 ^{+0.10} ₀															
1.25~2.00	13.8 ^{+0.10} ₀	9.1 ^{+0.10} ₀															
2.00~3.00	13.9 ^{+0.10} ₀	9.1 ^{+0.10} ₀															
A2		<table border="1"> <tr> <td>Z</td> <td>X</td> <td>Y</td> </tr> <tr> <td>0.75~1.25</td> <td>13.9^{+0.10}₀</td> <td>9.3^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>14.0^{+0.10}₀</td> <td>9.3^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>14.1^{+0.10}₀</td> <td>9.3^{+0.10}₀</td> </tr> </table>	Z	X	Y	0.75~1.25	13.9 ^{+0.10} ₀	9.3 ^{+0.10} ₀	1.25~2.00	14.0 ^{+0.10} ₀	9.3 ^{+0.10} ₀	2.00~3.00	14.1 ^{+0.10} ₀	9.3 ^{+0.10} ₀	C	11/ 12	A/ H
Z	X	Y															
0.75~1.25	13.9 ^{+0.10} ₀	9.3 ^{+0.10} ₀															
1.25~2.00	14.0 ^{+0.10} ₀	9.3 ^{+0.10} ₀															
2.00~3.00	14.1 ^{+0.10} ₀	9.3 ^{+0.10} ₀															

01

Code	Diagram	Panel cut out (mm)	Match the project selection														
			Actuator	Circuit	Terminal Blocks												
A3		<table border="1"> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75~1.25</td> <td>13.9^{+0.10}₀</td> <td>9.3^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>14.0^{+0.10}₀</td> <td>9.3^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>14.1^{+0.10}₀</td> <td>9.3^{+0.10}₀</td> </tr> </table>	Z	X	Y	0.75~1.25	13.9 ^{+0.10} ₀	9.3 ^{+0.10} ₀	1.25~2.00	14.0 ^{+0.10} ₀	9.3 ^{+0.10} ₀	2.00~3.00	14.1 ^{+0.10} ₀	9.3 ^{+0.10} ₀	C	11/ 12	A/ H
Z	X	Y															
0.75~1.25	13.9 ^{+0.10} ₀	9.3 ^{+0.10} ₀															
1.25~2.00	14.0 ^{+0.10} ₀	9.3 ^{+0.10} ₀															
2.00~3.00	14.1 ^{+0.10} ₀	9.3 ^{+0.10} ₀															
A4		Panel Thickness < 1.5mm 	C	11/ 12	A/ H												
A5		Panel Thickness < 1.3mm 	C	11/ 12	A/ H												
F1 防水型		<table border="1"> <tr> <th>Z</th> <th>X</th> <th>Y</th> </tr> <tr> <td>0.75~1.25</td> <td>13.7^{+0.10}₀</td> <td>9.0^{+0.10}₀</td> </tr> <tr> <td>1.25~2.00</td> <td>13.8^{+0.10}₀</td> <td>9.0^{+0.10}₀</td> </tr> <tr> <td>2.00~3.00</td> <td>13.9^{+0.10}₀</td> <td>9.0^{+0.10}₀</td> </tr> </table>	Z	X	Y	0.75~1.25	13.7 ^{+0.10} ₀	9.0 ^{+0.10} ₀	1.25~2.00	13.8 ^{+0.10} ₀	9.0 ^{+0.10} ₀	2.00~3.00	13.9 ^{+0.10} ₀	9.0 ^{+0.10} ₀	C	11/ 12	B/ I
Z	X	Y															
0.75~1.25	13.7 ^{+0.10} ₀	9.0 ^{+0.10} ₀															
1.25~2.00	13.8 ^{+0.10} ₀	9.0 ^{+0.10} ₀															
2.00~3.00	13.9 ^{+0.10} ₀	9.0 ^{+0.10} ₀															

4 TERMINAL CODE

Code	A	B	H	I
Diagram				
Description	3.7*0.5 Standard	2.8*0.5 Standard	3.7*0.5 Welding type	3.7*0.5 Welding type


5 : HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

6 : ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 Marking



01 07 110 111 Specific see attached list

NOTE

- The operation of the button have a variety of colors , the main color is black, white, red and green.
- The shell main color is black and white. ● The printed character on the button according to customer demand.

KCD10 EXAMPLE



KCD10-11-CA1H-W-R-07



KCD10-11-CA2A-B-R-01




KCD10-12-CF11-W-R-111




KCD11 Series Rocker Switches




SPECIFICATION

Function	Rocker Gear Switch , Third Gear
Contact Resistance	≤50mΩ
Insulation Resistance	≥100MΩ
Dielectric Strength	1500V
Mechanical Life(cycles)	>10000
Electronic Life(cycles)	10000
Amibent temperature	-0℃~105℃
Nomal position	2.5-7N
Max. Rating Current & Voltage	
 10(1)A /250V AC T105 Note: Single load 5(1)A 250VAC T105	


HOW TO ORDER

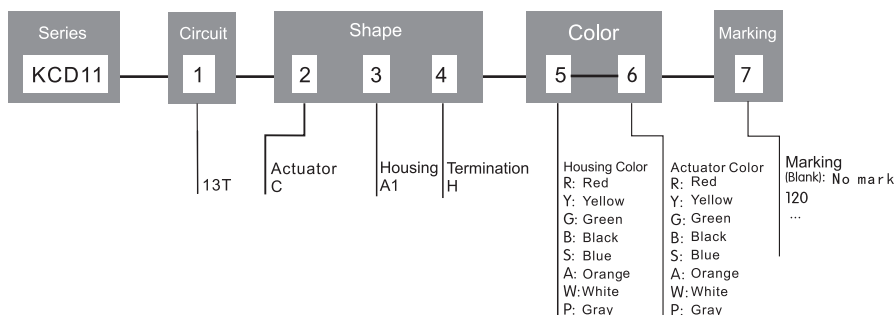


1 : CIRCUIT CODE

Code	Circuit	Note																
13T	 <table border="1" data-bbox="574 1299 742 1400"> <tr> <td>档位</td> <td>0</td> <td>I</td> <td>II</td> </tr> <tr> <td>电灯</td> <td>OFF</td> <td>ON</td> <td>ON</td> </tr> <tr> <td>C-1</td> <td>OFF</td> <td>ON</td> <td>ON</td> </tr> <tr> <td>C-2</td> <td>OFF</td> <td>OFF</td> <td>ON</td> </tr> </table>	档位	0	I	II	电灯	OFF	ON	ON	C-1	OFF	ON	ON	C-2	OFF	OFF	ON	SP-TT
档位	0	I	II															
电灯	OFF	ON	ON															
C-1	OFF	ON	ON															
C-2	OFF	OFF	ON															


2 : ACTUATOR CODE

Code	Diagram	Note
C		Arc-Shaped

3 : HOUSING CODE

Code	Diagram	Fix Size (mm)	Match the project selection		
			Actuator	Circuit	Terminal Blocks
A1		Special installation (according to the product appearance with fixed)	C	13T	H

4 : TERMINAL

Code	H
Diagram	
Note	Standard

5 : HOUSING COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

6 : ACTUATOR COLOR

Code	R	G	Y	S	W	B	P	A
Color	Red	Green	Yellow	Blue	White	Black	Gray	Orange

7 : Marking



Specific see attached list

01

Code	001	002	003	004	005	006	007	008
Marking								
Code	009	010	011	012	013	014	015	016
Marking								
Code	017	018	019	020	021	022	023	024
Marking								
Code	025	026	027	028	029	030	031	032
Marking								
Code	033	034	035	036	037	038	039	040
Marking								
Code	041	042	043	044	045	046	047	048
Marking								
Code	049	050	051	052	053	054	055	056
Marking								
Code	057	058	059	060	061	062	063	064
Marking								



Code	065	066	067	068	069	070	071	072
Marking	HIGH/HAUTE LOW/BASSE	REMOTE MANUAL	Auto Manuale	RUN STOP TOY	t c Manual	t c Manuale	AUTOMATIC	FORWARD STOP REVERSE
Code	073	074	075	076	077	078	079	080
Marking	GOAHEAD STOP BACK				 R	I R	开 保鲜 关	开 消毒 关
Code	081	082	083	084	085	086	087	088
Marking	自 停 手 动	高 速 高 效	助 力 健 身	力 速 加 加	强 力 变 频	爬 坡 节 能	超 经 济 力 济	经 济 运 动 模 式
Code	089	090	091	092	093	094	095	096
Marking	高 中 低	内 外	巡 航	III II I	0 I II	ON POWER OFF	ON OFF ON	RUN STOP
Code	097	098	099	100	101	102	103	104
Marking	E • S	L • R	A • M	PNA	A E	EP	ECO	
Code	105	106	107	108	109	110	111	112
Marking								 ○ —
Code	113	114	115	116	117	118	119	120
Marking			ON 自动 OFF	Frontward Backward	 ○	ION ○	SI NO	○
Code	121	122	123	124	125	126	127	128
Marking	开 加 热 关	I			关 电 源 开	ON 1	ON 2	ON 3

Code	129	130	131	132	133	134	135	136
Marking	ON 4	ON 5	手 动 遥 控	ON COLD OFF	— =		OFF ON	OFF ON
Code	137	138	139	140	141	142	143	144
Marking			0 	 	Hi Low	Off On	CERRAR ABRIR	ON O R
Code	145	146	147	148	149	150	151	152
Marking	脚踏 遥控	PEDAL REMOTE CONTROL						
Code	153	154	155	156	157	158	159	160
Marking		—	=			START		
Code	161	162	163	164	165	166	167	168
Marking		 	脚 踏 遥 控					ON OFF
Code	169	170	171	172	173	174	175	176
Marking	ON OFF		开 电 关 源		I ON OFF		高 速 低 速	D - R L - R
Code	177	178	179	180	181	182	183	
Marking				High Speed Low Speed	A 模 式 B 模 式	内 水 排 外		